


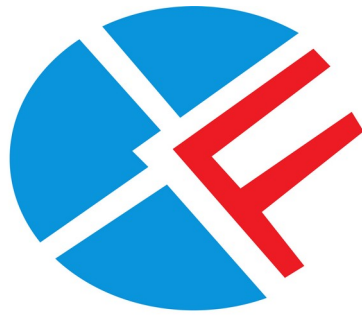

ZINGFA

Zhejiang Ankang Refrigeration Equipment Co.,Lid.

Piston Compressor

QL3- 134

Product Specification

Revision Record			
Revision	Reviser	Description	Date
A			25/8/1

Checked By

Date

Approved By

Date

1 Specification

1.1 Basic Specifications

Compressor Model	QL3-134
Compressor Type	Piston Compressor
Application	Medium/high back pressure
Refrigerant	R404A
Displacement(cc/Rev)	134.8
Oil Type	POE
Viscosity (sCt,40°C)	32
Oil Charge (mL)	1500
Rated Speed (r/min)	2900
IP Class	IP21
Compressor Colour	Black
(ID OF SUCTION TUBE)	1 3/4"-12 UNF
(ID OF DISCHARGE TUBE)	1 1/4"-12 UNF
(ID OF PROCESS TUBE)	Ø 7 ±0.2

1.2 Performance Specifications

Cooling Capacity (W)	5520
Cooling Capacity (BTU)	18820
input Power (W)	3620
COP (W/W)	1.52
EER (BTU/WH)	5.2
Rated run Current (A)	6.3
Sound Power (dBA)	≤ 65

Test Condition

	Evaporating Temp. °C	Condensing Temp. °C	Suction Temp. °C	Liquid Subcooling K	Ambient Temp. °C
M/HPB-AC	+7.2	+54.5	+35	8.3	+35
LBP	-23.3	+54.5	+32	22.2	+32

1.3 Electrical Characteristics

Motor type	3PH
Motor Poles	2

Power Supply	380--400V 3~ 50Hz 460v 3~ 60Hz
Starting capacitor (μF/V)	/
Running capacitor (μF/V)	/
Potential Relay	/
Winding Resistance (Ω 25℃)	2.2
Locked Rotor Current (A)	68
Insulation Class	F
Dielectric Strength	2000VAC/1S/5mA

1.4 Safety Running Limitation

Tightness Test Pressure (Mpa)	2.2
High Side Max Running pressure (Mpa)	3.2
Low side Max Running Pressure (Mpa)	2.0
Discharge Temp.Limit (°C)	≤125

2 Compressor Protection

2.1 motor protector

Internal Protector For Motor Protection


2.2 High Pressure Relieve

Internal Pressure Protection

3 Running Envelope

活塞式QL系列压缩机适用范围R404

QL MODELS Operating Conditions R404

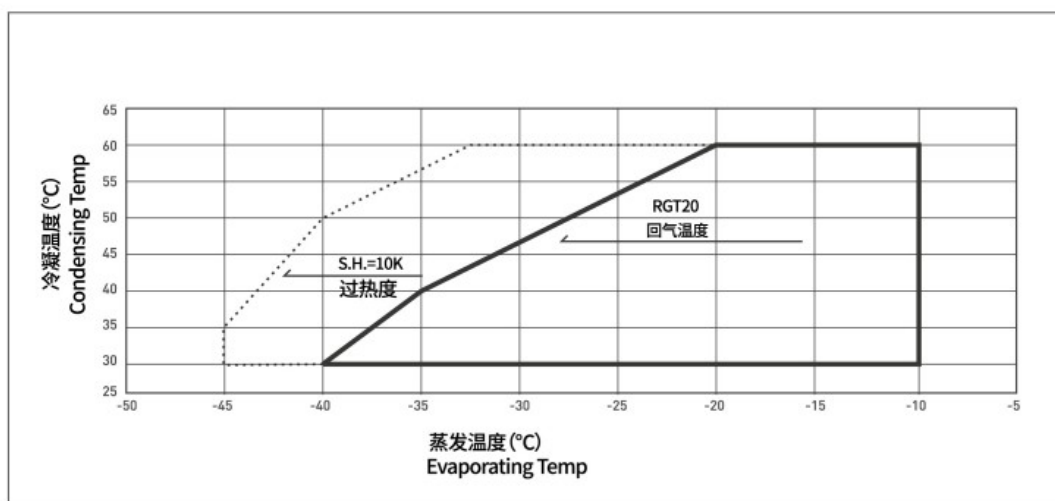

4 Performance date type QL3-134

Performance date at 50Hz

Refrigerating capacity (watts)

evaporating temperature °C	Condensing temperature °C						
	30	35	40	45	50	55	60
-40	4177						
-35	5149	4874	4246				
-30	6698	6388	5698	4956	4579	3842	
-25	8823	8450	7641	6788	6360	5523	4740
-20	11530	11063	10076	9058	8551	7563	6637
-15	14821	14230	13007	11767	11153	9962	8843

Motor input (watts)

evaporating temperature °C	Condensing temperature °C						
	30	35	40	45	50	55	60
-40	2860						
-35	3060	2952	2741				
-30	3328	3268	3155	3045	2992	2885	
-25	3663	3650	3628	3610	3602	3586	3569
-20	4066	4096	4160	4229	4264	4333	4401
-15	4538	4608	4753	4901	4977	5127	5274

Return gas 32 °C
Subcooling 0 K

5 Accessories

Serial number	Name	Quantity	Notes
1	Compressor	1	
2	Grommet	4	
3	Sleeve	4	
4	VALVE	2	Needed

6. PACKING,TRANSPORTATION AND STORAGE

6.1 The packing should be moisture-resistant, and prevent the compressor in it being damaged. The letters and marks on the package should be clearly painted.

6.2 Don't incline the compressor more than 45°.

6.3 The compressor should be kept in the place with normal room temperature, and should be kept out of corrosive atmosphere.

7 Attention

7.1 It is not allowed to perform vacuum in the system by using the refrigeration compressor. The compressor can start only after the refrigerant is charged;

7.2 It is not allowed to charge the refrigerant from the suction or discharge line closes to the compressor. The charge port should be arranged on the connection pipe of suction line accumulator or receiver, which is far away from the compressor, to avoid the liquid refrigerant flooding back;

7.3 The refrigerant charge amount complies with local regulations;

7.4 It is not allowed to run compressor in vacuum, not allowed to run compressor without refrigerant, and not allowed to run compressor in the reversed direction for long duration;

7.5 The compressor can only work with approved refrigerants;

7.6 The compressor is not allowed to work outside its envelope. System design should guarantee the suction line superheat and avoid the liquid refrigerant flooding back;

7.7 When the suction and discharge plugs are removed, the assembly and brazing should be done in 15 minutes;


7.8 The frequently start/stop compressor should be avoided. The suggested minimum continuous running time is 10 minutes to guarantee the safe oil level ($\geq 50\%$ initial charge volume), the suggested minimum interval between start and stop is 3 minutes.

7.9 A 45W crankcase heater is recommended to avoid the refrigerant migration during the off circle and flooded start. The crankcase heater should be powered on 12 hours earlier before the first start or restart after long duration off;


7.10 The system should be equipped with necessary protection devices for pressure, temperature, oil return, overcurrent and phase fault, etc.

7.11 The compressor is not allowed to lay down or place upside down during transportation, stock and installation. The maximum inclination is 15° when the compressor is running.


8 Mount Diagram

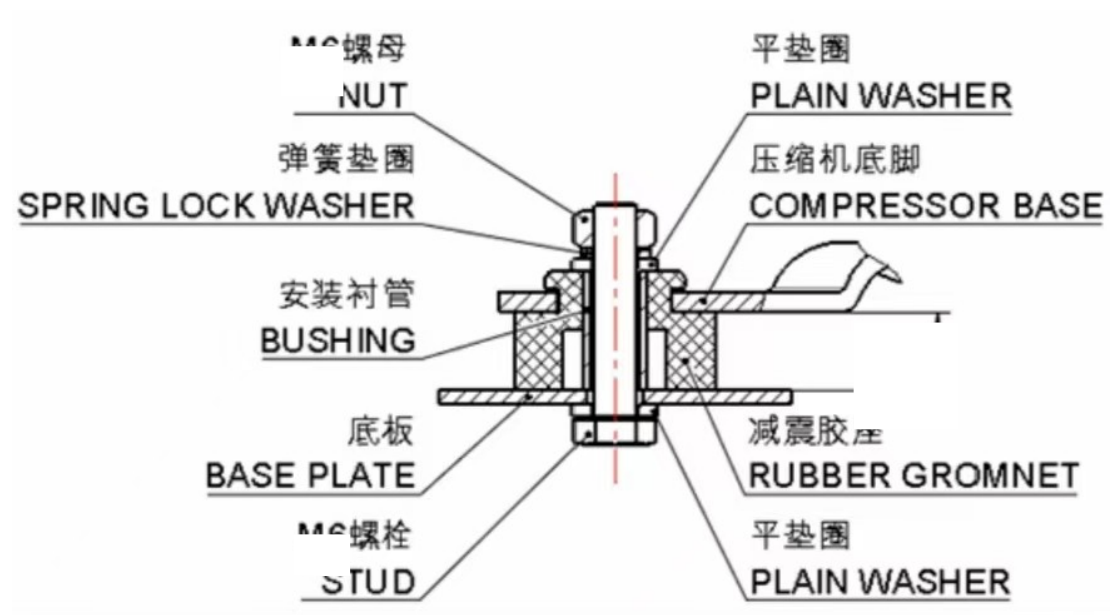

9 Wiring Diagram

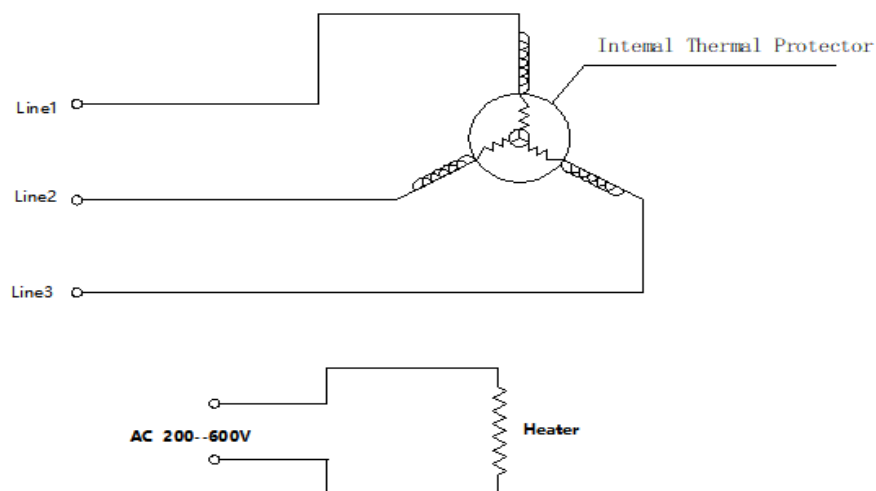

10 PISTON COMPRESSOR Dimensional Drawing

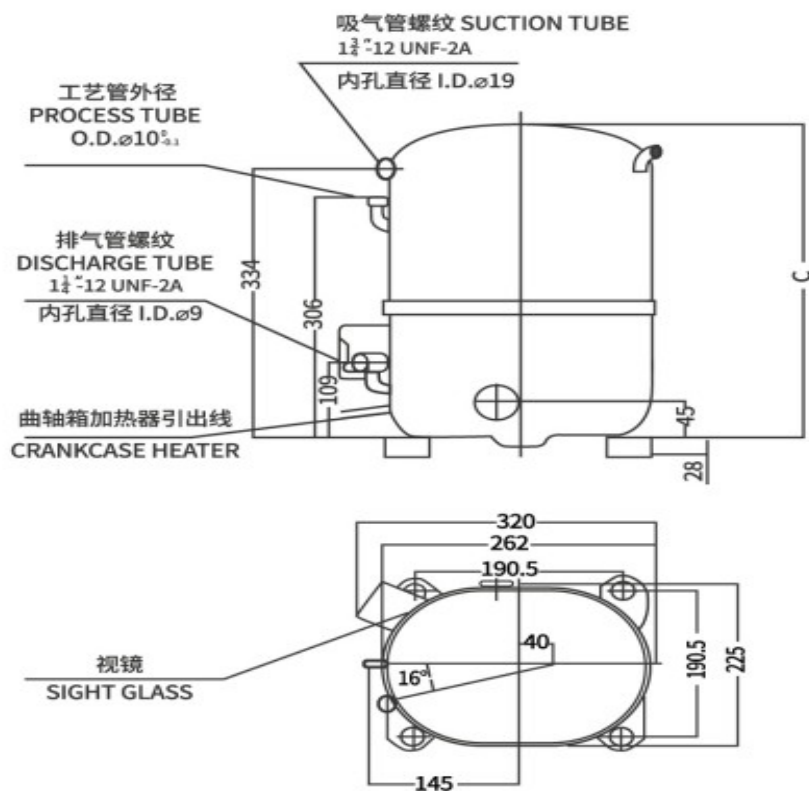

MODEL	C (IN/mm)
QR3-90	15.7/398
QR3-100	
QR3-112	15.7/398
QL3-112	
QR3-124	15.7/398
QL3-124	
QR3-134	15.7/398
QL3-134	